

TMVI521312AUSS

Caleffi 5213 TMV 15mm Tempering Valve with Hot and Cold Check Valves and Isolators Stainless Box





Technical Specification

- Temp Adjustment Range 30 - 50°C
- Temp Control +/- 2°C
- Max Op. Temp. 85°C
- Operating Press. Range 20 - 500kPa
- Max. Inlet Press. Differential 6:1
- Max Test Press. 1000kPa
- Min. flow rate 4L/min
- Material DZR Brass
- Min. Operating Failsafe Temp. Differential 10°C
- Approval: AS4032.1



Flow rate graph

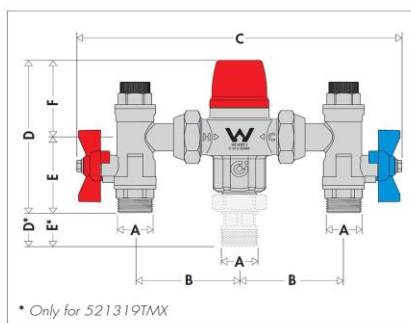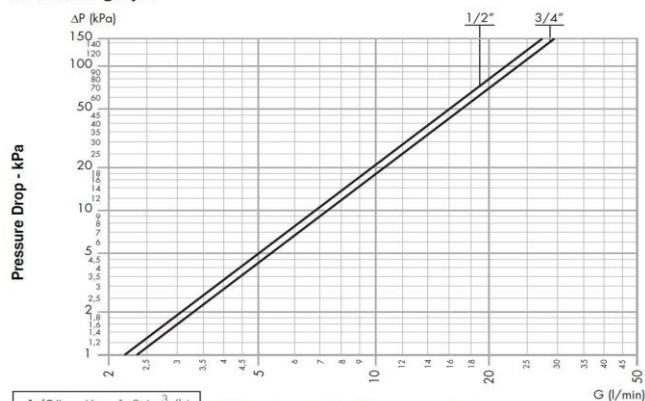

Code	521312TMX	521319TMX
A	1/2"	3/4"
B	62	76
C	198	237,5
D	103	133
E	54,5	84
F	48,5	49

* Only for 521319TMX

Application

The Caleffi 5213 TMV 15mm Tempering Valve with Hot and Cold Check Valves and Isolators Stainless Box is used in plumbing systems to control water temperature and is installed mostly to feed a bathroom.

Warranty

[Download the latest warranty statement](#)

Features

- Australian Standards approved TMV valve with 15mm union isolators
- Approved for point of use applications e.g. directly under hand basins.
- Flow rate between 4 and 27L/min
- Recommended working pressure 20 - 500kPa (balanced)
- Union isolators with hot and cold check valves
- Body in dezincification resistant brass
- In wall polished Stainless steel box with hinged door and lock
- Dimensions 300x300x70mm