


TVI521319AU

Caleffi 5213 20mm Tempering Valve with Hot and Cold Check Valves and Isolators



Technical Specification

Temp Adjustment Range 30 - 50°C
 Temp Control +/- 3°C
 Max Op. Temp. 85 °C
 Operating Press. Range 20 - 500 kPa
 Max. Inlet Press. Differential 6:1
 Max Test Press. 1000 kPa
 Min. flow rate 4L/min
 Material DZR Brass
 Min. Operating Failsafe Temp. Differential 10°C
 AS 4032.2 Approval

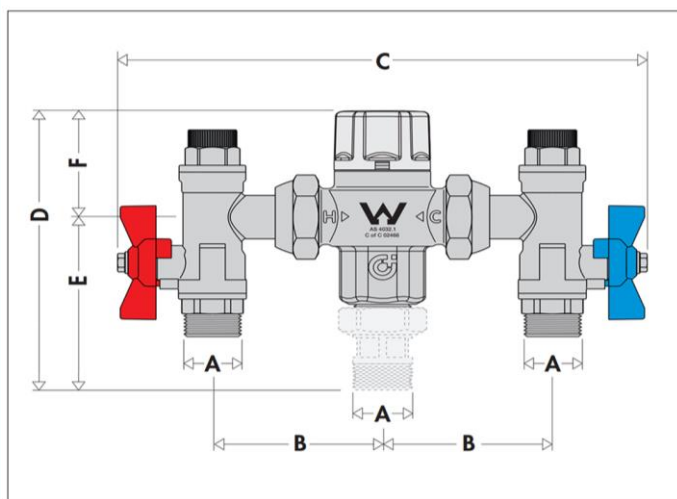

Code	TVI521319AU
A	3/4"
B	76
C	237,5
D	126,5
E	84
F	42,5

Application

The Caleffi 5213 20mm Tempering Valve with Hot and Cold Check Valves and Isolators is used in plumbing systems to control water temperature and is installed mostly to feed a bathroom.

Warranty

[Download the latest warranty statement](#)

Features

- Australian Standards approved valve with 20mm 90° isolator unions
- Union isolator connectors with o-ring seal with hot and cold check valves
- Temperature range adjustable 30 - 50°C
- Max. operating temperature 85°C
- Body in dezincification resistant brass