


TVI521319AUSS

Caleffi 5213 20mm Tempering Valve with Hot and Cold Check Valves and Isolators In Stainless Box



Technical Specification

- Temp Adjustment Range 30 - 50°C
- Temp Control +/- 3°C
- Max Op. Temp. 85 °C
- Operating Press. Range 20 - 500 kpa
- Max. Inlet Press. Differential 6:1
- Max Test Press. 1000 kPa
- Min. flow rate 4L/min
- Material DZR Brass
- Min. Operating Failsafe Temp. Differential 10°C
- AS 4032.2 Approval

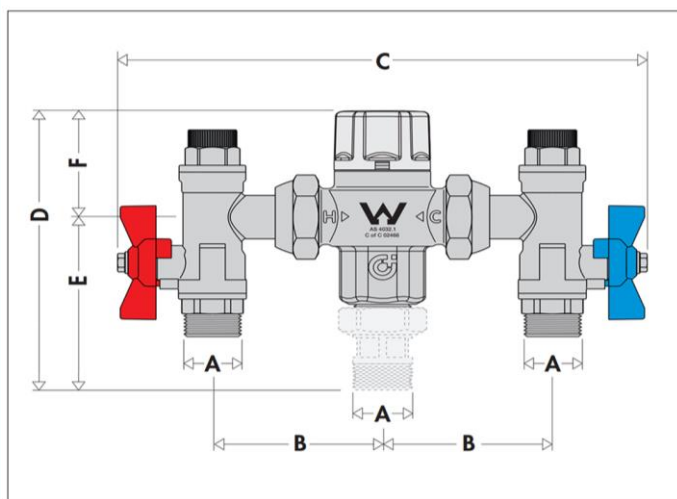

Code	TVI521319AU
A	3/4"
B	76
C	237,5
D	126,5
E	84
F	42,5

Application

The Caleffi 5213 20mm Tempering Valve with Hot and Cold Check Valves and Isolators In Stainless Box is used in plumbing systems to control water temperature and is installed mostly to feed a bathroom.

Warranty

[Download the latest warranty statement](#)

Features

- Australian Standards approved valve with 20mm 90° isolator unions
- Union isolator connectors with o-ring seal with hot and cold check valves
- Temperature range adjustable 30 - 50°C
- Max. operating temperature 85°C
- Body in dezincification resistant brass
- In wall polished Stainless steel box with hinged door and lock
- Dimensions 300x300x70mm