


TMVU521319AU

Caleffi 5213 Low Lead TMV 20mm Tempering Valve with Hot and Cold Check Valves



Technical Specification

- Temp Adjustment Range 30 - 50°C
- Temp Control +/- 2°C
- Max Op. Temp. 85°C
- Operating Press. Range 20 - 500kPa
- Max. Inlet Press. Differential 6:1
- Max Test Press. 1000kPa
- Min. flow rate 4L/min
- Material DZR Brass
- Min. Operating Failsafe Temp. Differential 10°C
- Approval: AS4032.1

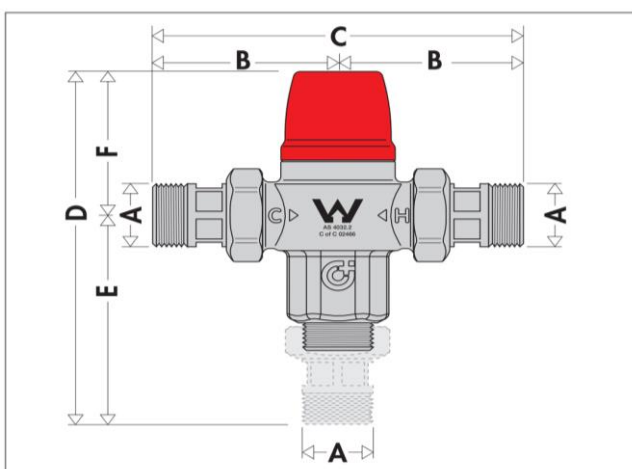

Code	TMVU521319AU
A	3/4"
B	64
C	128
D	128
E	79.5
F	48.5

Application

The Caleffi 5213 Low Lead TMV 20mm Tempering Valve with Hot and Cold Check Valves is used in plumbing systems to control water temperature and is installed mostly to feed a bathroom.

Warranty

[Download the latest warranty statement](#)

Features

- Australian Standards approved low lead TMV with 20mm low lead unions
- Approved for point of use applications e.g. directly under hand basins.
- Flow rate between 4 and 27L/min
- Recommended working pressure 20 - 500kPa (balanced)
- Union connectors with o-ring seal with hot and cold check valves and strainers
- Body in dezincification resistant brass