

PRTV539500H


Caleffi 10in1 Temperature & Pressure Combi 20mm
Low lead



Technical Specification

CR Dezincification resistant alloy body "LOW LEAD"
Connection: G 3/4" F (ISO 228-1)
Maximum working pressure: 10bar
Adjustment temperature range: 35-65°C
Kv: 1.7m³/h

Certified to EN 1111 and EN 1287

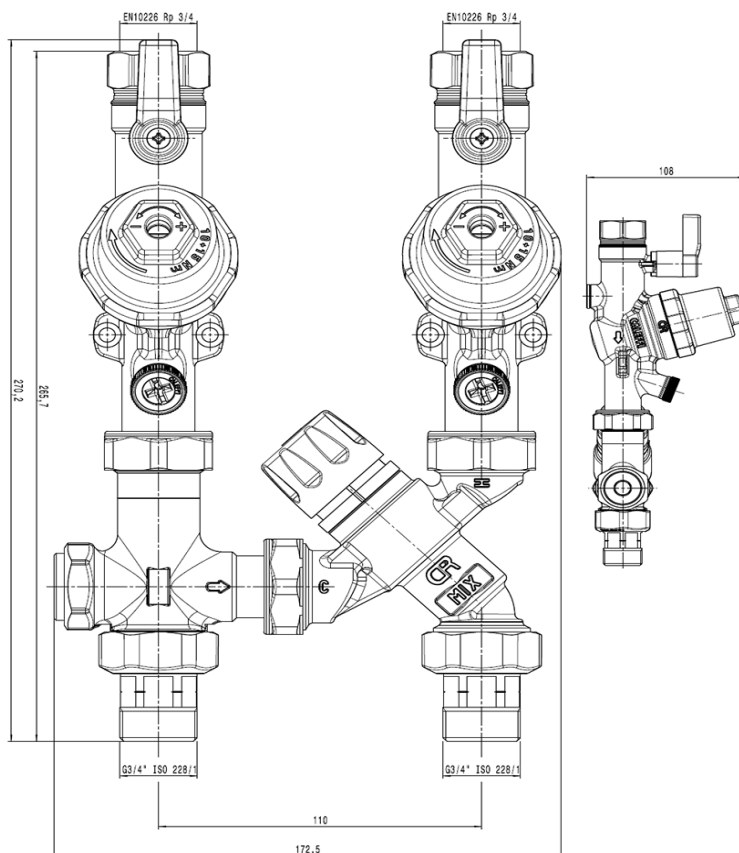

Application

The Caleffi 10in1 Temperature & Pressure Combi 20mm Low lead is used in plumbing systems to control water pressure and is installed mostly to feed a bathroom.

Warranty

[Download the latest warranty statement](#)

Features

- Caleffi 10in1 Temperature & Pressure Combi 20mm Low lead
- 10 in 1 combined group valve for pressure and temperature control in domestic water systems. Consisting of:
 - 539H series combined unit, cold water circuit
 - 539H series combined unit, hot water circuit
 - adjustable thermostatic mixing valve and advanced thermal performance and anti-scald function
 - connection tee complete with check valve
 - pressure gauges (optional)