

HS108701

HP Anti-freeze valve 1&1/4"



Technical Specification


Materials

- Tee Body: brass EN 12164 CW617N
- Thermostatic cartridge body: brass EN 12165 CW724R
- Springs: stainless steel
- Seals: EPDM
- Connections: 1&1/4" flat face

Performance

- Medium: water
- Maximum working pressure: 10bar
- Working temperature range: 0–65°C
- Ambient temperature range: -30–60°C
- Medium temperature (opening): 3°C
- Medium temperature (closing): 4°C
- Accuracy: ±1°C
- Kv (straight path): 60m3/h

108701

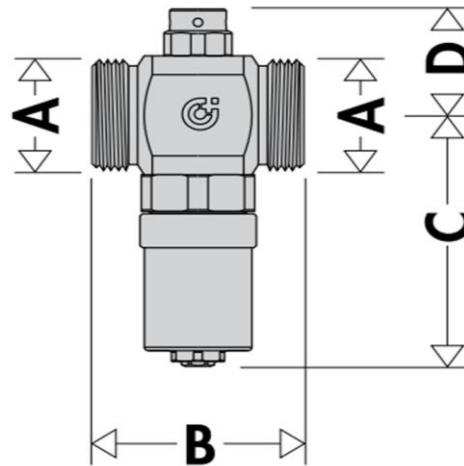

Code	A	B	C	D
108701	1 1/4"	59	83	36

Application

The HP Anti-freeze valve 1&1/4" is used in heating & cooling systems to provide a safety function and is installed mostly outside the plant room.

Warranty

[Download the latest warranty statement](#)

Features

The antifreeze valve allows the circuit medium to be drained when its temperature reaches an average value of 3°C. This prevents ice forming in the circuit of a system, generally with a heat pump, avoiding potential damage to the machine and to the pipes.

When the temperature of the water in the pipe drops below 3°C, the obturator of the antifreeze valve opens and drains off the water. The obturator closes when the medium temperature returns to 4°C.