


## MTR116160

Caleffi 116 Series Thermostatic Regulating Valve  
25mm



### Technical Specification

Medium: drinking water  
 Max. working pressure: 16 bar  
 Max. differential pressure: 1 bar  
 Max. inlet temperature: 90°C  
 Adjustment temperature range: 35–65°C  
 Factory setting: 52°C  
 Kv max (m3/h): 3.8  
 Kv min (m3/h): 0.9±20%  
 Kv (Dt=5K) (m3/h): 1.6  
 1" F (DN 25) (EN 10226-1)  
 Temperature gauge/probe pocket: Ø10mm

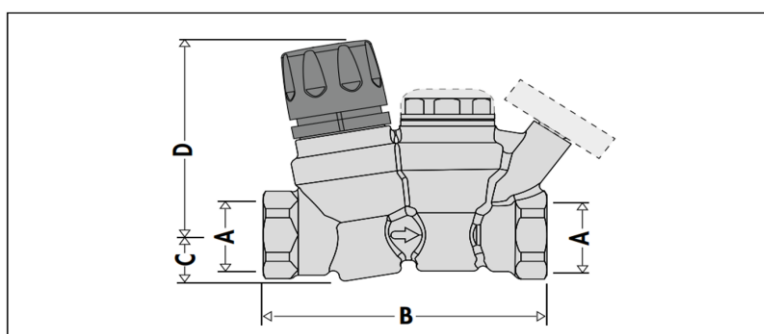

Code	DN	A	B	C	D	Mass (kg )
116.50	20	3/4"	100	18,5	74,5	0,700
116.60	25	1"	115	26,5	110,5	1,400
116.70	32	1 1/4"	115	26,5	110,5	1,200

### Application

The Caleffi 116 Series Thermostatic Regulating Valve 25mm is used in plumbing systems to control water temperature and is installed mostly in plant rooms.

### Warranty

[Download the latest warranty statement](#)

### Features

116 Series thermostatic regulating/balancing valve 25mm.  
 The thermostatic regulator is used for automatic balancing of recirculation circuits in domestic hot water distribution systems, so as to ensure that all parts of the system reach the required temperature.  
 Fitted for automatic or controlled thermal disinfection function.  
 Body in low lead brass alloy  
 Comes with a temperature gauge for circuit temp check